

DISPLAY


AVAILABLE COLORS



Silver



Black

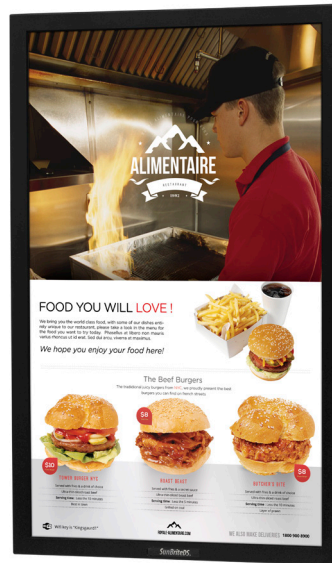

SHOWN IN BLACK

KEY FEATURES

- 42" Pro Series True-Outdoor All-Weather Digital Signage for permanent outdoor installation
- Portrait Orientation only, use SB-4217HD for landscape installation
- Ultra-Bright (700 NIT) 42-inch full HD, 1080p LED screen for improved outdoor viewing
- Direct Sunlight-Readable
- Anti-glare protective glass and removable front bezel for easy field servicing
- Massive, side-opening cable/media bay provides easy access (Opening: 8.00" x 13.0" x 3.0" deep / Interior: 8.87" x 13.9" x 2.1" deep)
- Media bay power port powers media players without the need for external cords (5v@3.5amps / 12v@3amps)
- Top mounted cable ports
- High temperature Enhanced Solar Tolerance (EST) technology prevents isotropic blackout
- Thermal-flow air ventilation system keeps the unit cool & dry in temperatures up to 122 degrees F
- Ability to operate in cold weather (-40 degrees F)
- Exterior designed to protect internal components from rain, snow, dust, insects, humidity, and salt air
- Powder-coated rust-proof aluminum exterior for strength and durability
- RS232 serial control with discrete on, off, and input control (located in the cable-entry compartment)
- Rear IR receiver (located in the cable-entry compartment)
- Innovative water-tight Cable Entry System seals out moisture and allows for easy hook-ups
- Weatherproof detachable 20W speaker bar (optional) (Top or bottom mount)
- Quick-change filtration cartridges
- Weatherproof remote control
- Weatherproof control buttons with optional tamper-proof plate
- Remote control Lock-out prevents unauthorized users from changing the programming
- Includes, Weatherproof Remote Control, Warranty, and Manual

<p>SCREEN</p>	<p>SCREEN 42-inch Diagonal Color Active Matrix TFT LED</p> <p>RESOLUTION 1920 x 1080 Full-HD 1080p</p> <p>ASPECT RATIO 16:9</p> <p>CONTRAST RATIO 1300:1</p>	<p>FRAME RATE 120 Hz</p> <p>VIEWING ANGLE 178° x 178°</p> <p>RESPONSE TIME 12 milliseconds</p> <p>TV FORMATS 1080p, 1080i, 720p, 720i, 480p, 480i</p>
<p>CONNECTIONS</p>	<p>RF Antenna/CATV (ATSC/QAM/NTSC) x1</p> <p>HDMI HDMI™ Input x2</p> <p>VIDEO COMPOSITE S-Video x1 or Composite Video x1, L/R Audio Inputs x1</p> <p>VIDEO COMPONENT YPbPr plus Stereo Audio x2</p> <p>PC VGA 15-pin D-sub VGA plus Stereo Audio</p>	<p>CONTROL SET RS232 Serial, Discrete IR Control, Concealed IR Window</p> <p>AUDIO OUT Digital SPDIF Audio(Fixed) Analog 1/8" headphone jack (Variable)</p> <p>SPEAKERS Optional - 20 Watt detachable speaker bar (top or bottom mount)</p> <p>INPUT POWER 100-240 VAC, 50-60 Hz 2.0 A @ 120v Max (1.25 A @ 120v)</p>
<p>TEMPERATURE TOLERANCES</p>	<p>OPERATING TEMP -40° to 122° F. (-40° to 50°C.)</p> <p>NON-OP. TEMP -40° to 140° F. (-40° to 60°C.)</p> <p>(OFF MODE WITH POWER APPLIED) The non-operating temperature feature requires power to be applied.</p>	
<p>PHYSICAL SPECS</p>	<p>ACCESSORIES INCLUDED Weatherproof remote control, top or bottom mount speaker bar</p> <p>EXTERIOR Powder-coated aluminum</p> <p>EXTERIOR COLORS Black, & Silver</p> <p>TV DIMENSIONS 23.41" W x 39.43" H (42.43" H with speakers) x 5.57"D</p> <p>595mm W x 1002mm H (1076mm H with speakers x 141mm D)</p> <p>VESA MOUNT PATTERN 400mm x 400mm</p>	<p>TV WEIGHT 55 lbs/25kg (59lbs/26.8kg with speaker)</p> <p>SHIPPING DIMENSIONS TBD</p> <p>SHIPPING WEIGHT 69 lbs/31.3kg</p> <p>RESIDENTIAL WARRANTY Two-year parts and labor</p> <p>COMMERCIAL WARRANTY Two-year parts and labor</p>